


SUPER CORFLO >>>

COMPRESSION TESTING SUMMARY

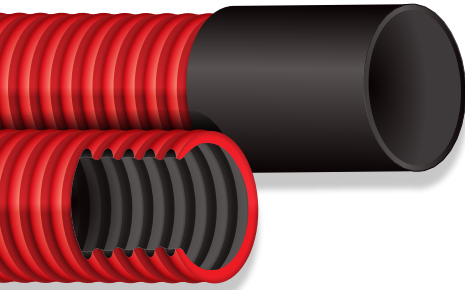

ABOUT SUPER CORFLO

Super Corflo is a dual-wall coilable polyolefin duct, and is the economical choice for conduit and inner duct applications. The dual-wall design offers a light-weight, easy to handle conduit system with an increased crush-resistance, and semi-smooth inner wall for ease of cable pulling. Super Corflo® can be used anywhere Rigid PVC is used: Inner City work (structures), Solar Farms, or any Open Trench work.

SUPER CORFLO

Temp	Room Temp				Sub Freezing			
Support	Pipe Only				Pipe Only			
O.D Deflection %	5%		30%		5%		30%	
Pipe Size	Load (lbs)	Pipe Stiffness (PSI)	Load (lbs)	Pipe Stiffness (PSI)	Load (lbs)	Pipe Stiffness (PSI)	Load (lbs)	Pipe Stiffness (PSI)
2"	80.2	681.6	198.5	266.5	143.0	1153.1	264.5	353.5
3"	82.7	470.0	187.9	177.6	127.7	728.7	254.9	241.3
4"	93.1	393.1	229.0	161.5	107.3	455.7	254.3	179.5

SCHEDULE 40

Temp	Room Temp				Sub Freezing			
Support	Pipe Only				Pipe Only			
O.D Deflection %	5%		30%		5%		30%	
Pipe Size	Load (lbs)	Pipe Stiffness (PSI)	Load (lbs)	Pipe Stiffness (PSI)	Load (lbs)	Pipe Stiffness (PSI)	Load (lbs)	Pipe Stiffness (PSI)
2"	500.0	4233.3	Max Out	n/a	500.0	4233.3	Max Out	n/a
3"	500.0	2853.9	Max Out	n/a	500.0	2853.9	Max Out	n/a
4"	500.0	2224.2	Max Out	n/a	500.0	2228.1	Max Out	n/a